



DATASHEET

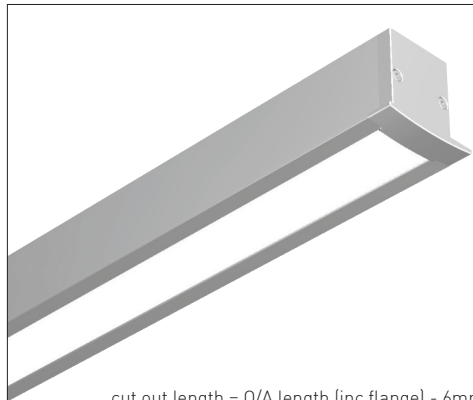

cut out length = O/A length (inc flange) - 6mm

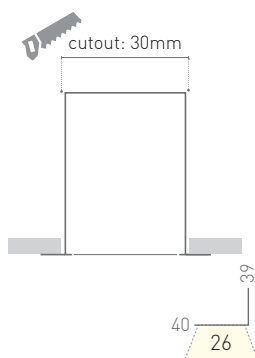

DIRECT	AKWAFIL Resin Encapsulation			
LED lumens/m	500	1000	1500	2250
Delivered Lumens/m ^{1,2}	265	530	795	1193
Standard CRI	>80			
System W/m				
2700K	4	8	13	21.7
3000K	4	7.9	12.5	21.7
3500K	4	7.6	12	20
4000K	4	7.7	12	19.6
Other LED Options	RGBW · solid colours available upon request.			
Control (Remote) ⁴	non dim · DALI · DMX (RGBW only) ³			
Optics	AKWAFIL - symmetrical			
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised			
Weight/Pack Size	1.3kg/m - 70 x 70 x (L + 200mm)			
Mounting	recessed bracket mount			
Accessories	mitred bends · T-joins			
Luminaire Length	any length over 500mm with fully illuminated diffuser			

EKKAKF026BMDR-AKWAFIL-20211207-01

DIRECT	AKWASEAL Resin Encapsulation			
LED lumens/m	500	1000	1500	2250
Delivered Lumens/m ^{1,2}	325	650	975	1463
Standard CRI	>80			
System W/m				
2700K	4	8	13	21.7
3000K	4	7.9	12.5	21.7
3500K	4	7.6	12	20
4000K	4	7.7	12	19.6
Other LED Options	RGBW · solid colours available upon request.			
Control (Remote) ⁴	non dim · DALI · DMX (RGBW only) ³			
Optics	AKWASEAL - symmetrical			
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised			
Weight/Pack Size	1.1kg/m - 70 x 70 x (L + 200mm)			
Mounting	recessed bracket mount			
Luminaire Length	Any length between 500mm - 3000mm with fully illuminated diffuser			

1. Lumens/m based on 4000K LED strip.

2. Due to tolerances of the production process and the electrical components, values for light output, colour temperature and electrical power can vary up to 10%

3. DMX (to be located in suitable IP enclosure/location by others)

4. Control gear remote to luminaire - Does not fit through cut-out

EKKAKS026BMDR-AKWASEAL-20210622-01