




## DATASHEET

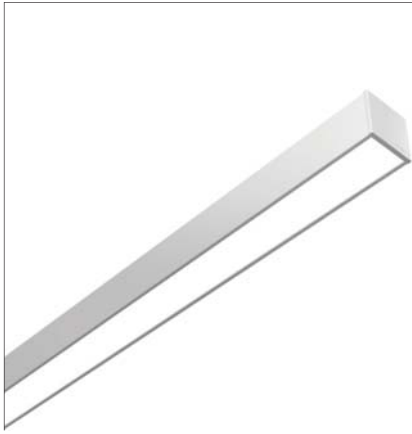

KLIKLED<sup>+</sup>

Direct	AKWASEAL				
LED lumens/m	1000	1500	2250	3350	4500
Delivered Lumens/m	680	1020	1530	2119	3060
Standard CRI	>90				
System W/m	L70 B10 - 130,000 hrs				
2700K	10.8	17.3	24.8	36	43.2
3000K	9.1	15.8	23.5	34.5	41
3500K	9.1	15.8	23.4	34.5	41
4000K	9.7	14	22.7	33.4	38.9
<b>Other LED Options</b>	5000K · RGBW · tuneable white · cyanosis · high CRI 98 R9 > 80				
<b>Control</b>	non dim · DALI · Casambi · DMX*				
<b>Optics</b>	AKWASEAL - symmetrical				
<b>Finish</b>	white/black/silver powder coat standard · custom powder coat				
<b>Weight/Pack Size</b>	4.1kg/m - 127 x 159 x (l+100mm)				
<b>Mounting</b>	wire suspended · rod suspended · surface mount bracket · wall mount bracket				
<b>Accessories</b>	mitred bends · T-joins · sensors · emergency recessed LED · others available				
<b>Luminaire Length</b>	any length over 500mm with fully illuminated diffuser				
<b>Circuit</b>	All power circuits based on 16A type C circuit breaker				

\* Remote Only

