

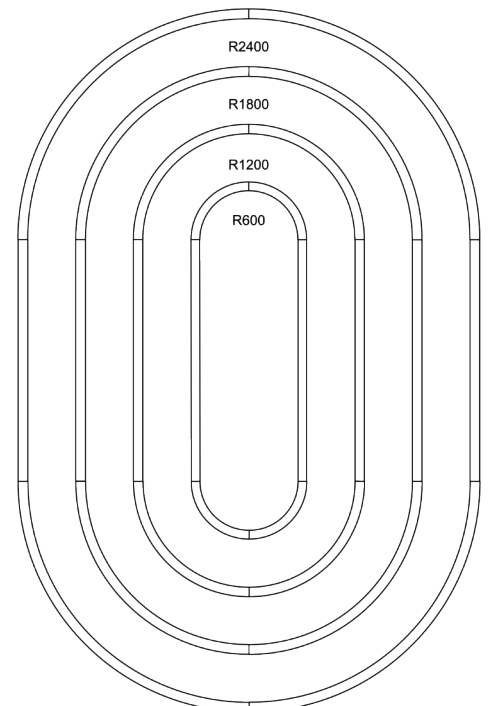


*cut out length = O/A length (inc flange) - 14mm

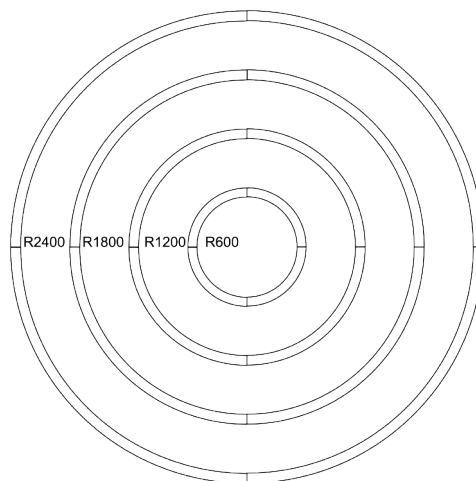

Direct	LEDoptek				
LED lumens/m	1000	1500	2250	3350	4500
Delivered Lumens/m	650	975	1463	2025	2925
Standard CRI	>90				
System W/m					
2700K	10.8	17.3	24.8	36	43.2
3000K	9.1	15.8	23.5	34.5	41
3500K	9.1	15.8	23.4	34.5	41
4000K	9.7	14	22.7	33.4	38.9
Other LED Options	5000K · RGBW · tuneable white · cyanosis · high CRI 98 R9 > 80				
Control	non dim · DALI · Casambi · 0-10V · DMX				
Optics	LEDoptek - symmetric				
Finish	white/black/silver powder coat standard · custom powder coat				
Weight / Size	4.7kg/m - 90mm x 85mm				
Mounting	recessed mounting bracket · direct fix to overhead structure				
Accessories on straight	mitred bends · T-joints · sensors · emergency recessed LED · others available				
Luminaire Length	Min radius 600mm, can join Kurv to Kurv and Kurv to straight Kalli				

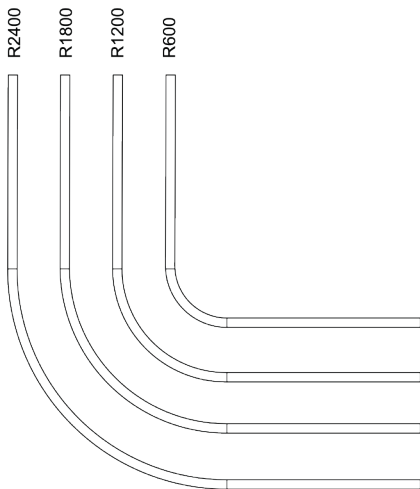

- 22.5°-90° arc angle
- 4 standard radii
- Custom curves available upon request