



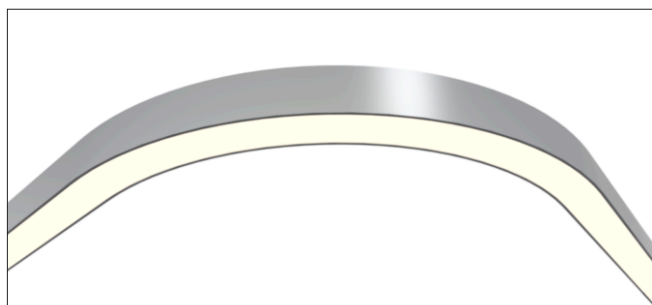
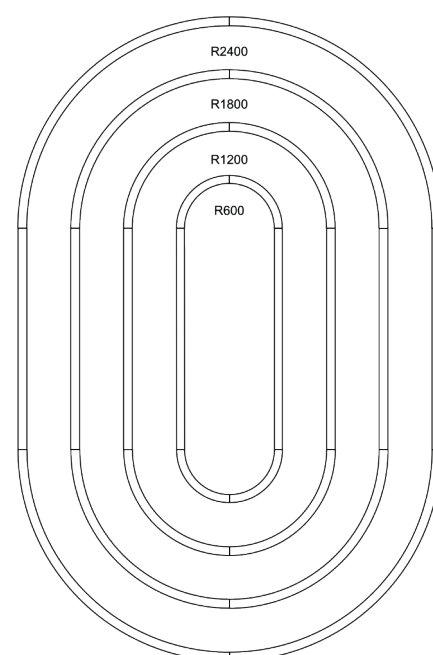


DATASHEET

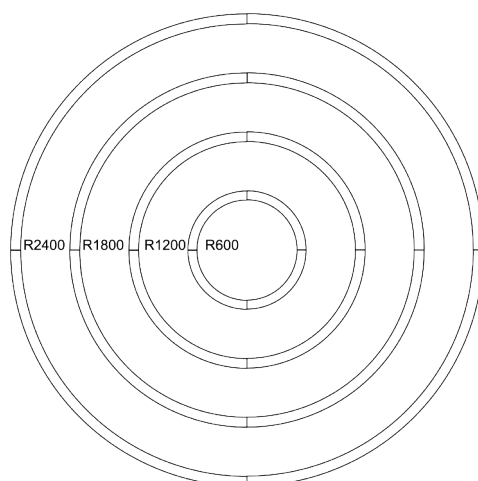

KLIKLED⁺

Direct	LEDoptek					
LED lumens/m	-	1000	1500	2250	3350	4500
Delivered Lumens/m	-	700	1050	1575	2345	3150
Standard CRI	>90					
Indirect						
LED lumens/m	500	1000	1500	2250	3350	-
Delivered Lumens/m	410	820	1230	1845	2555	-
Standard CRI	>90					
System W/m						
2700K	4.6	10.8	17.3	24.8	36	43.2
3000K	4.4	9.1	15.8	23.5	34.5	41
3500K	4.3	9.1	15.8	23.4	34.5	41
4000K	4.2	9.7	14	22.7	33.4	38.9
Other LED Options	5000K · RGBW · tuneable white · cyanosis · high CRI 98 R9 > 80					
Control	non dim · DALI · Casambi · 0-10V · DMX					
Optics	LEDoptek - symmetric (direct) · LEDoptek - symmetric (indirect)					
Finish	white/black/silver powder coat standard · custom powder coat					
Weight/Size	5.8kg/m - 90mm x 120mm					
Mounting	wire suspended · rod suspended · wall mount bracket					
Accessories on straight	mitred bends · T-joins · sensors · emergency recessed LED · others available					
Luminaire Length	Min radius 600mm, can join Kurv to Kurv and Kurv to straight Kalli					

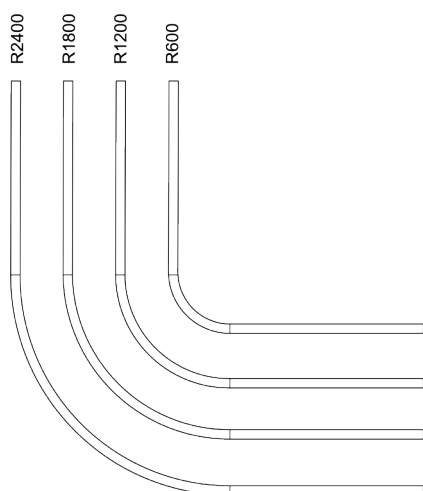

- 22.5°-90° arc angle
- 4 standard radii
- Custom curves available upon request