



DATASHEET

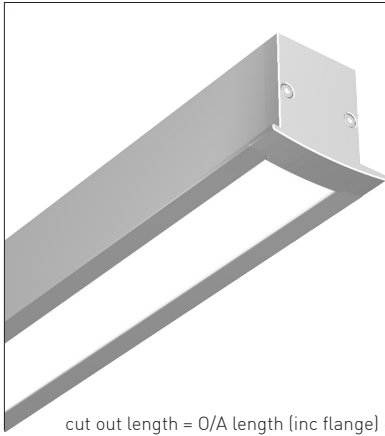

cut out length = O/A length (inc flange) - 6mm

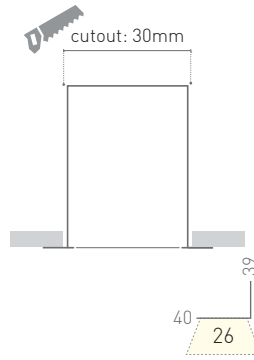

KLIKLED⁺

DIRECT	LEDoptek			
LED lumens/m	500	1000	1500	2250
Delivered Lumens/m ¹	320	640	960	1440
Standard CRI	>80			
System W/m				
2700K	4	8	13	21.7
3000K	4	7.9	12.5	21.7
3500K	4	7.6	12	20
4000K	4	7.7	12	19.6
Other LED Options	5000K · RGBW · tuneable white · cyanosis · high CRI 98 R9 > 80			
Control (Remote)²	non dim · DALI · Casambi · 0-10V · DMX (RGBW only)			
Optics	LEDoptek - symmetrical			
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised			
Weight/Pack Size	1kg/m - 70 x 70 x (L + 200mm)			
Mounting	recessed bracket mount			
Accessories	mitred bends · T-joins			
Luminaire Length	any length over 500mm with fully illuminated diffuser			

1. Lumens/m based on 4000K LED strip

2. Control gear remote to luminaire - Does not fit through cut-out