




DATASHEET

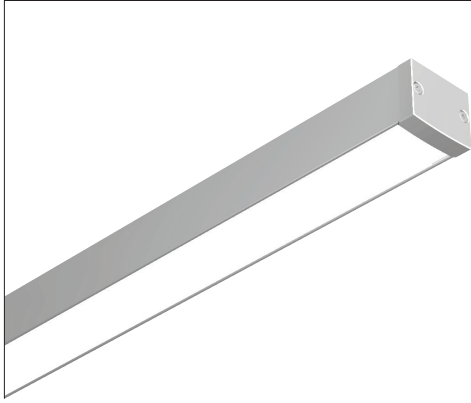

KLIKLED^{®+}

DIRECT	AKWAFIL Resin Encapsulation		
LED lumens/m	500	1000	1500
Delivered Lumens/m ^{1,2}	285	570	855
Standard CRI	>80		
System W/m			
2700K	4	8	12.8
3000K	4	7.7	12.5
3500K	4	7.7	12
4000K	4	7.7	12
Other LED Options	solid colours available upon request.		
Control	non dim · DALI		
Optics	AKWAFIL - symmetrical		
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised		
Weight/Pack Size	1.0kg/m - 70 x 70 x (l + 200mm)		
Mounting	wire suspended · rod suspended · surface mount bracket · wall mount bracket		
Accessories	mitred bends · T-joins		
Luminaire Length	any length over 500mm with fully illuminated diffuser		

1. Lumens/m based on 4000K LED strip.
 2. Due to tolerances of the production process and the electrical components, values for light output, colour temperature and electrical power can vary up to 10%

EKKAKF026BXD-AKWAFIL-20220209-01