




EVO 55 BEAM D

DATA SHEET

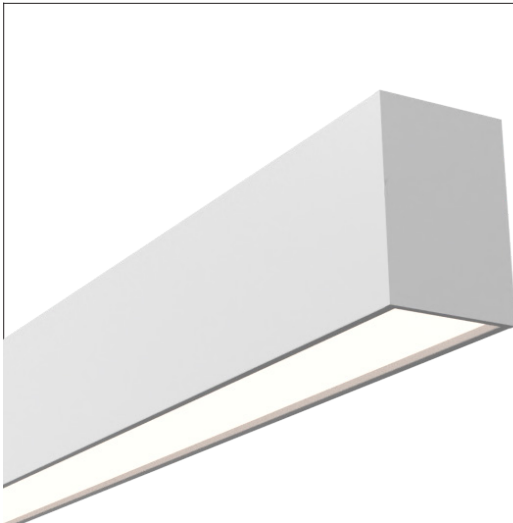

DIRECT	LED +			
LED lumens/m	1347	1761	2278	3004
Standard CRI	>80 · [CRI>90 on request]			
System W/m				
3000K	16	19	26	35
4000K	16	19	26	35
5000K	16	19	26	35
Other LED Options	Tunable White			
Control (Remote/Integral)	Non-dim (D0) · DALI (DA) · Casambi (CA) · Push-Dim (PD) · Tunable White (T2)			
Optics	LED+			
Finish	White (11) · Black (10) · Anodic Natural Matt (75) Powder coat standard · Custom powder coat (CU)			
Weight	2.9kg/m			
Mounting	Surface (S) · Wire Pendant (P) · Rod Pendant (D) · Fixed Wall (W) · Trimless Recessed (T)			
Accessories	Mitred Bends · T-joints · V Joins · L Joins · X Joins · Y Joins			
Luminaire Length	Any Length longer than 600mm			

1. Lumens/m based on 4000K

Ordering Code (Example)

EV055BMD-IP-S-16-90-30-LD-D0-11-2500

Length	Custom to client request (no shorter than 600mm)
Finish	Black (10) · White (11) · Anodic Natural Matt (75)
Controls	Non-dim (D0) · DALI (DA) · Push-Dim (PD) · Casambi (CA) · Tunable White (T2)
Optics	LED+ (LD)
Colour Temperature	3000K (30) · 4000K (40) · 5000K (50) · Tunable White (T2)
CRI	CRI>80 (80) · CRI>90 (90)
Wattage	16W/m (16) · 19W/m (19) · 26W/m (26) · 35W/m (35)
Mounting	Surface (S) · Wire Pendant (P) · Rod Pendant (D) · Fixed Wall (W) · Trimless Recessed (T)
IP Rating	IP20 () · IP55 (IP)
Product Code	KLIK EVO BEAM 55 D (EV055BMD)