


## DATASHEET

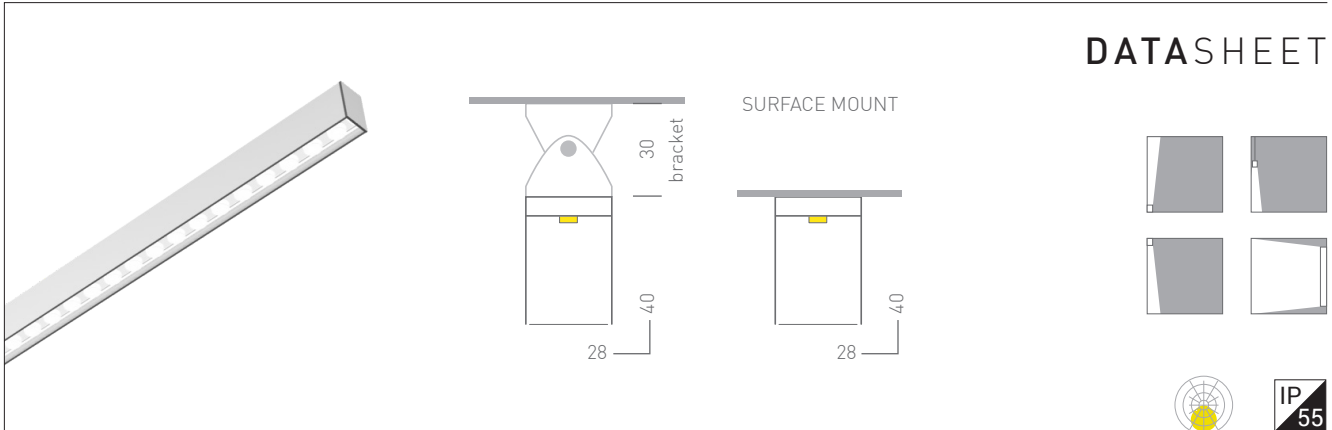

<b>Weight/Pack size</b>	1.0kg/m - 70 x 70 x (L + 200mm)
<b>Finish</b>	clear anodised · silver powder coat · white powder coat · custom colour
<b>Mounting</b>	surface mount · suspended · bracket mount
<b>Accessories</b>	custom angled connectors · others available

\* All IP rated luminaires tested to AS60529-2004 Degrees of protection provided by enclosures (IP Code)

### KLIKLED<sup>+</sup> LEDSTREAM




#### DIRECT

Colour	3000K			4000K		
	<b>LED Lumen/m<sup>1</sup></b>	3000	4500	5800	3000	4500
<b>Standard CRI (Ra)</b>	>80	>80	>80	>80	>80	>80
<b>LED Watts/m</b>	24	37	47	24	37	47
<b>Control</b>	Non Dim · DALI · (0-10 USA only)					
<b>Optics</b>	Lensed · 20° · 40° · 20° x 40° spreader					
<b>Luminaire Length</b>	Custom lengths in 50mm (Nominal) increments with fully illuminated diffuser					
<b>LEDs</b>	Cree					

1. Other colours available on request

LED-FOCUS-20171108-01

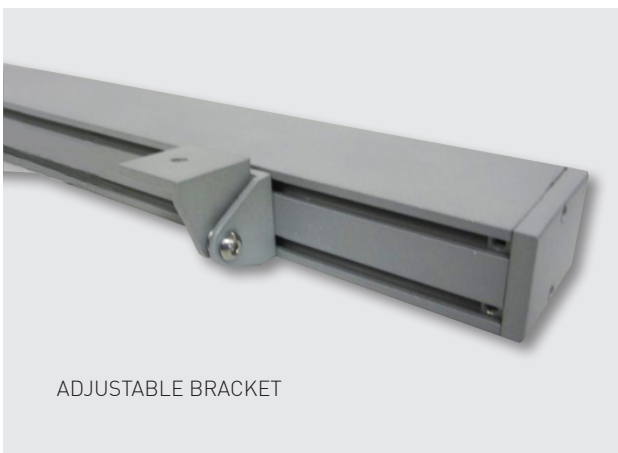

ADJUSTABLE BRACKET



INDIVIDUALLY LENSED