





- Minimal streamlined construction
- Strong and durable aluminium profiles
- Designed for ease of installation
- Continuous construction with the use of "T" posts spaced along work bench
- Dot free LED strips use 24V SELV Power Supplies (Dimming available)

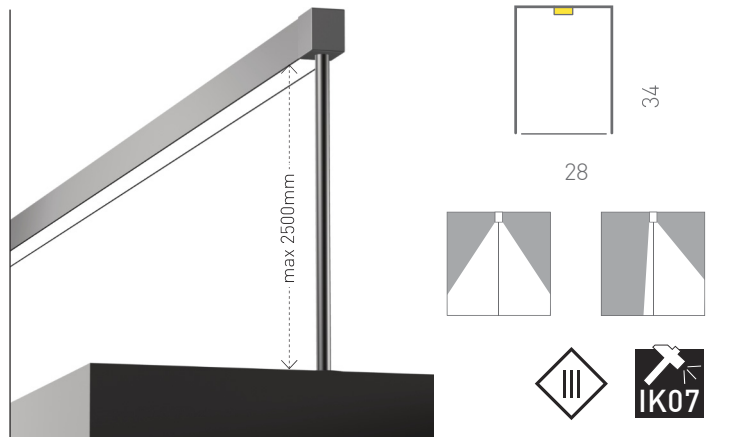

KLIKLED®
see over for LED options

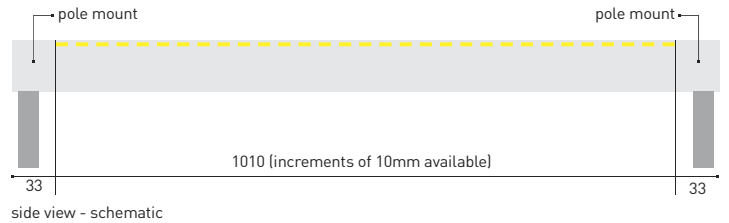

remote gear
24V



optics
LEDoptek and asymmetrical



finish
black, white, silver
custom colours available



specifications subject to change without notice



DIRECT	LEDOptek			
LED lumens/m	500	1000	1500	2250
Delivered Lumens/m ¹	311	621	932	1397
Standard CRI	>80			
System W/m				
2700K	4	8	13	21.7
3000K	4	7.9	12.5	21.7
3500K	4	7.6	12	20
4000K	4	7.7	12	19.6
Other LED Options	5000K · RGBW			
Control	non dim · DALI · Casambi · 0-10V · DMX (RGBW only)			
Optics	LEDOptek - symmetrical · asymmetrical			
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised			
Weight/Pack Size	1.2kg/m - 70 x 70 x (l + 200mm)			
Mounting	pole mount with internal wiring · "T" pole bracket for continuous runs			
Accessories	mitred bends · others available			
Luminaire Length	any length over 500mm in 10mm increments			
Circuit	all power circuits based on 16A Type C circuit breaker			

1. Lumens based on LEDOptek - symmetrical optics

LSTL-LEDOptek-20230420-01