

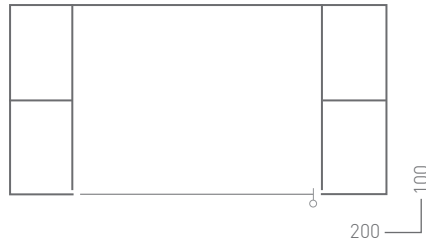


## DATASHEET

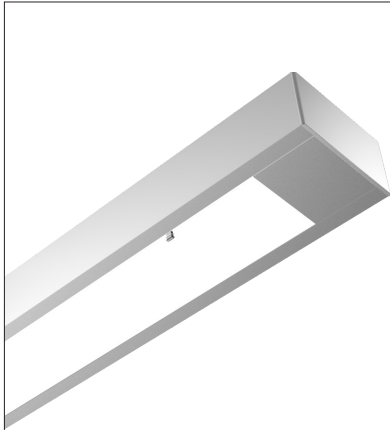

DIRECT	LEDoptek				
LED lumens/m	1000	1500	2250	3350	4500
Delivered Lumens/m <sup>1</sup>	738	1107	1661	2299	3321
Standard CRI	>90				
<b>System W/m</b>					
2700K	10.8	17.3	24.8	36	43.2
3000K	9.1	15.8	23.5	34.5	41
3500K	9.1	15.8	23.4	34.5	41
4000K	9.7	14	22.7	33.4	38.9
<b>Other LED Options</b>	5000K · RGBW · tuneable white · cyanosis · high CRI 98 R9 > 80				
<b>Control</b>	non dim · DALI · Casambi · 0-10V · DMX				
<b>Optics</b>	LEDoptek - symmetrical				
<b>Finish</b>	white/black/silver powder coat standard · custom powder coat · clear anodised				
<b>Weight/Pack Size</b>	7.5kg/m - 180 x 270 x (L + 200mm)				
<b>Mounting</b>	wire suspended · rod suspended · surface mount				
<b>Accessories</b>	mitred bends · T-joins · power outlets · concealed PA speaker systems · sensors · emergency recessed LED · others available				
<b>Luminaire Length</b>	Based on minimum increments of 850mm (600mm luminous opening) or 1450mm (1200mm luminous opening)				

1. Lumens based on LEDoptek - symmetrical optics

KLIKLED-LAB2-LEDoptek-20190619-01



KBRB, Brisbane · Lighting Design: SKM & Hassell