LEDstream Recessed

DATASHEET

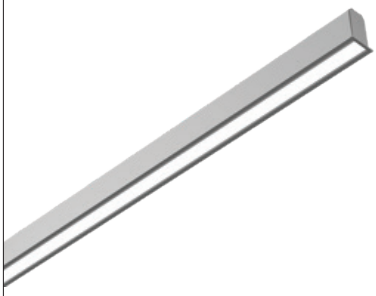





†cut out length = O/A length (inc flange) - 8mm

KLIKLED®+

DIRECT	LEDoptek			
LED lumens/m	500	1000	1500	2250
Delivered Lumens/m[1]	311	621	932	1397
Standard CRI	>80			
System W/m				
2700K	4	8	13	21.7
3000K	4	7.9	12.5	21.7
3500K	4	7.6	12	20
4000K	4	7.7	12	19.6
Other LED Options	5000K · RGBW			
Control[2]	non dim · DALI · Casambi · 0-10V · DMX (RGBW only)			
Optics	LEDoptek - symmetrical · LEDoptek - asymmetrical			
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised			
Weight/Pack Size	1.2kg/m - 70 x 70 x (l + 200mm)			
Mounting	direct fixed to overhead structure standard · recessed bracket mount			
Accessories	mitred bends · others available			
Luminaire Length	any length over 500mm with fully illuminated diffuser			

1. Lumens based on LEDoptek - symmetrical optics
2. Control gear remote to luminaire - Does not fit through cut-out
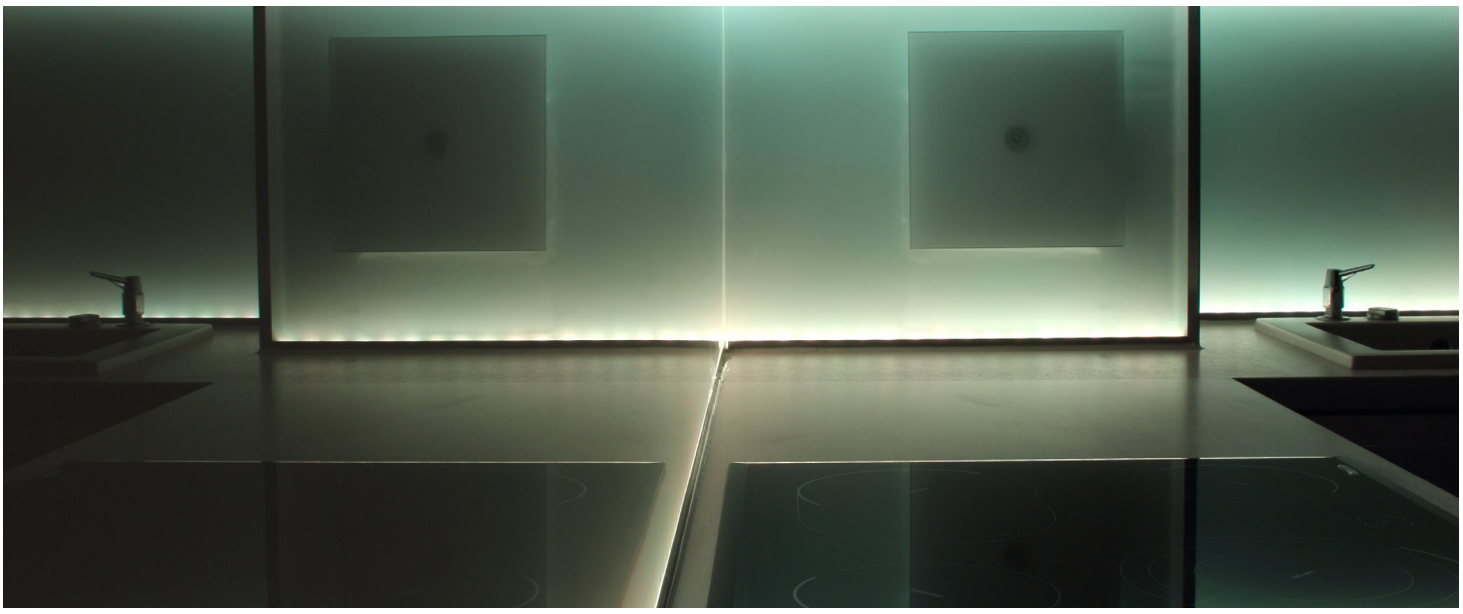
LSREC-LEDoptek-20191015-01