



DATASHEET

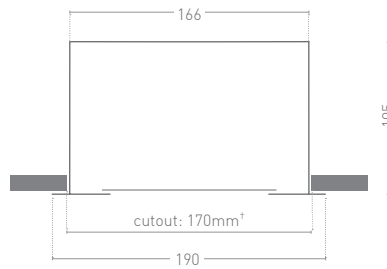

[†]cut out length = O/A length (inc flange) - 28mm

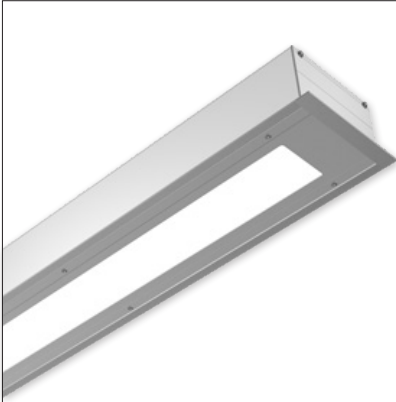

DIRECT	LEDOptek				
LED lumens/m	1000	1500	2250	3350	4500
Delivered Lumens/m ¹	613	920	1379	1909	2759
Standard CRI	>90				
System W/m					
2700K	10.8	17.3	24.8	36	43.2
3000K	9.1	15.8	23.5	34.5	41
3500K	9.1	15.8	23.4	34.5	41
4000K	9.7	14	22.7	33.4	38.9
Other LED Options	5000K · RGBW · tuneable white · cyanosis · high CRI 98 R9 > 80				
Control	non dim · DALI · Casambi · 0-10V · DMX				
Optics	Primary: clear toughened glass · Secondary: LEDOptek - symmetrical · LEDOptek - asymmetrical · ULB with LEDOptek				
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised				
Weight/Pack Size	9.4kg/m - 210 x 260 (L + 200mm)				
Mounting	direct fixed to overhead structure standard · suspended from bracket (on application)				
Accessories	mitred bends · T-joins · camera · cable ducts · concealed PA speaker systems · sensors emergency recessed LED · others available				
Luminaire Length	Based on minimum increments of 950mm (630mm luminous opening) or 1550mm (1230mm luminous opening)				

1. Lumens based on LEDOptek - symmetrical optics

166RRIP-LEDOptek-20190605-01



Parramatta Station, Sydney · Lighting Design: WSP